

Lightweight anti-ballistic shields

TenCate Targa-Light™ CX-400 TL Flash V2

CX-400 TL - FLASH V2

Product application	Tactical Anti-ballistic shield (briefcase)
Type of protective cover	Black textile
Composition	• HPPE
Dimensions	• 470 x 1000 mm ± 5 mm (Deployed) • 470 x 470 mm ± 5 mm (Folded)
Protected Area	• 450 x 100 mm ± 5 mm
Weight	• 11,0 kg ± 0,5 kg
Shape	• Flat
Included features	• Moulded handle for hand held - ambidextrous • Forearm strap • Strap for shoulder held • Magnetic quick release buckle to secure/deploy the shield • Velcro patch for identification
Validity	11-10-2021



SPECIAL THREATS TESTED

Test temperature of 20°C
Multi hit (100 mm between shots)
• 7.62 x 39 PS-Ball, MSC (720 m/s ± 10 m/s)
• 7.62 x 51 M80 (NIJ 0108.01, level III)
The above list of ammunition is not exhaustive and may not include threats that can be defeated by this product.

HANDLING

• Keep away from intense heat source
• Do not drop the shield on the floor and avoid hard shock(s)
• Do a visual inspection of the insert every six-month
• In case of visual damages, send the insert back for inspection / repair
• Do only clean with pure water or mild soap
• Use only as a shield, do not seat or walk on it

GUARANTEE PERIOD

The plate is expected to preserve its conformity with the specifications for a period of at least 5 years during storage from the date of delivery, provided that:

- The product is stored under dry conditions at normal ambient temperature
- The product has not been subjected to peak temperature exceeding 70°C
- The product is protected against long term direct exposure to sun light

Please find instructions for folding and unfolding on the next page.

Although TenCate Advanced Armour has used diligent care to ensure that the information provided in this document is accurate and up to date, TenCate Advanced Armour makes no representation or warranty, express or implied, as to the accuracy, reliability or complete-ness of the information. In no event shall TenCate Advanced Armour be liable for any damages arising from the reader's reliance upon, or use of, the information or materials contained in this document. The reader shall be solely responsible for any interpretation or use of this information and materials. The content of this document is subject to change without further notice. Please contact your TenCate Advanced Armour representative for more details.

TENCATE
Targa-light™

UNFOLD THE FLASH


1. Carry the shield by one of the two inner handles.
2. Pull the orange strap of the magnetic buckle downward
3. Shield is deployed



FOLD THE FLASH

CAUTION : wrong handling during folding can cause damage to shield.
 Please follow the below instructions strictly.

1. Carry the shield in standard mode.
2. Turn the shield upside down.
3. Take down the middle panel
4. Fold the last panel over the two others.
5. Shield is folded.
6. Secure the shield with the magnetic buckle.

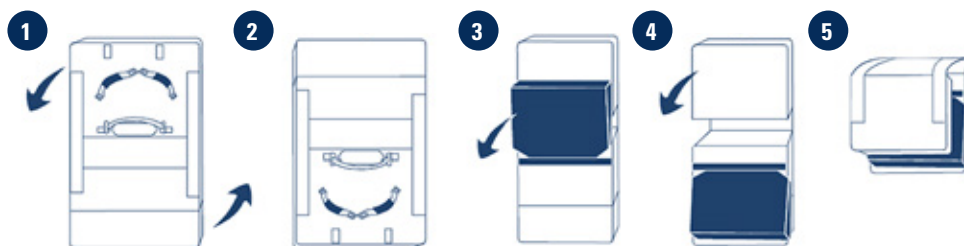

Although TenCate Advanced Armour has used diligent care to ensure that the information provided in this document is accurate and up to date, TenCate Advanced Armour makes no representation or warranty, express or implied, as to the accuracy, reliability or complete-ness of the information. In no event shall TenCate Advanced Armour be liable for any damages arising from the reader's reliance upon, or use of, the information or materials contained in this document. The reader shall be solely responsible for any interpretation or use of this information and materials. The content of this document is subject to change without further notice. Please contact your TenCate Advanced Armour representative for more details.